



CAD GENERATED DRAWING. DO NOT MANUALLY UPDATE. DO NOT SCALE. PROPERTY OF SUBEC AB. DOCUMENT MUST NOT BE REPRODUCED. COPIED OR USED FOR ANY UNAUTHORIZED PURPOSE.

REVISIONS			
REV.	DATE	EDITOR	CHANGES, COMMENTS

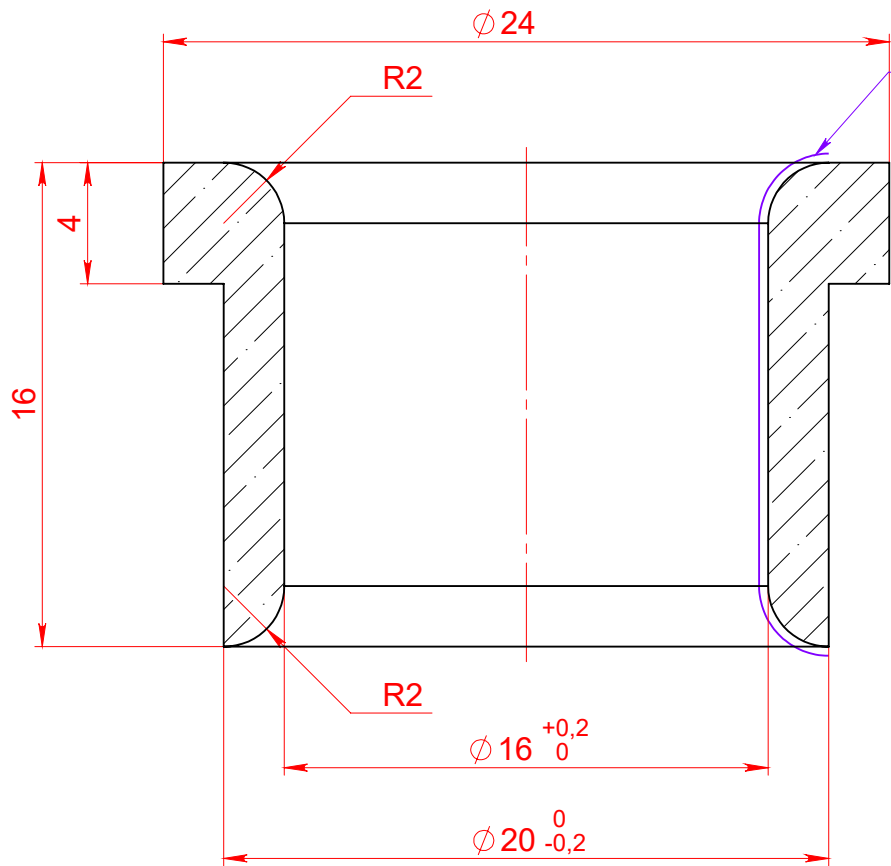

Smooth tangential transitions
without edges
Diamond Polished Ra=0.5

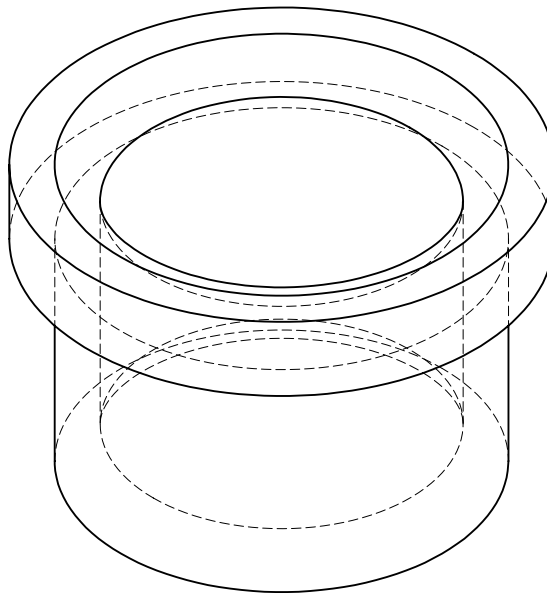

Ra 1,0

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM							 subec	FINISH: Normal finish Ra=1.0 Diamond polished Ra=0.5 HRC: Hardness ~1850HV		MATERIAL: Al2O3 99,7%
HOLE COORDINATES ⊕ ± 0,1mm	CHAMFERS 		DEBUR AND BREAK SHARP EDGES					WEIGHT: 0.0 kg		
GENERAL TOLERANCES FOR MANUFACTURING ISO 2768-fH								TITLE: Cearamic Guide With Flange Ød=16mm		
LINEAR DIMENSIONS	<3 ±0,05	>3 ±0,05	>6 ±0,1	>30 ±0,15	>120 ±0,2	>400 ±0,3	>1000 ±0,5			A4
ANGULAR DIMENSIONS	<10 ±1°	>10 ±30'	>50 ±20'	>120 ±10'						SCALE: 4:1
STRAIGHTNESS — FLATNESS ▮	<10 0,02	>10 0,05	>30 0,1	>100 0,2	>300 0,3	>1000 0,4		DWG NO.	ARTICLE NO.	
PERPENDICULARITY SYMMETRY ⊥	<100 0,2	>100 0,3	>300 0,4	>1000 0,5				1-400603-00_4288		SHEET 1 OF 1
RUN-OUT ROUNDNESS ○	0,1							1-400603-00		
PROJECT:										
DRAWN							EIL	2020-11-05		