
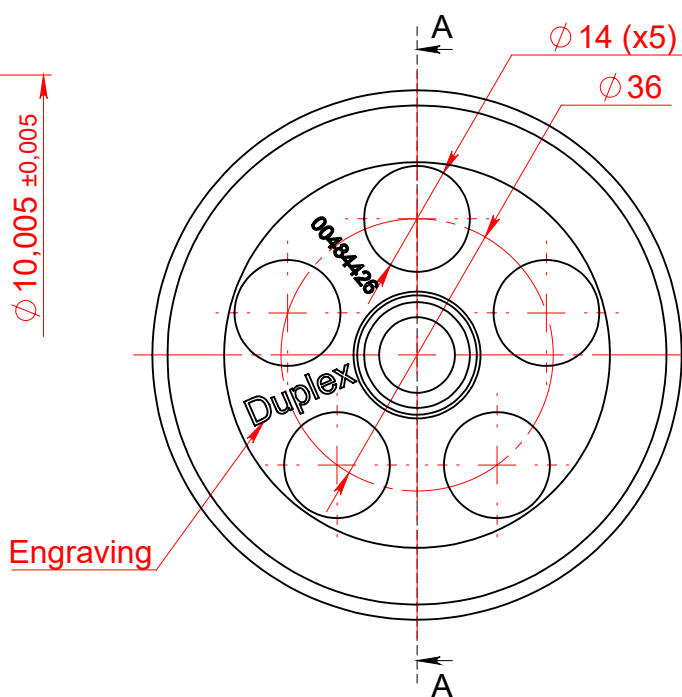
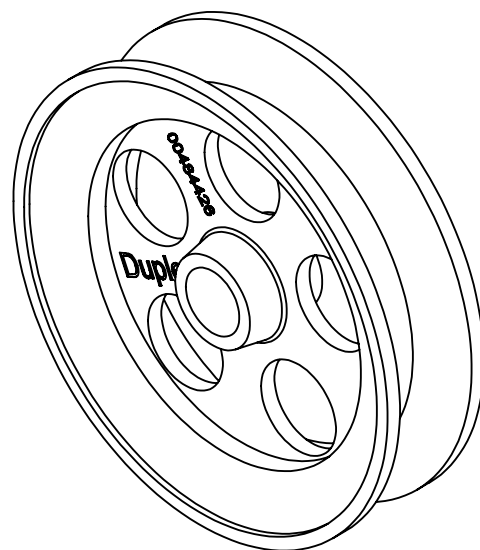


REVISIONS			
REV.	DATE	EDITOR	CHANGES, COMMENTS

SECTION A-A

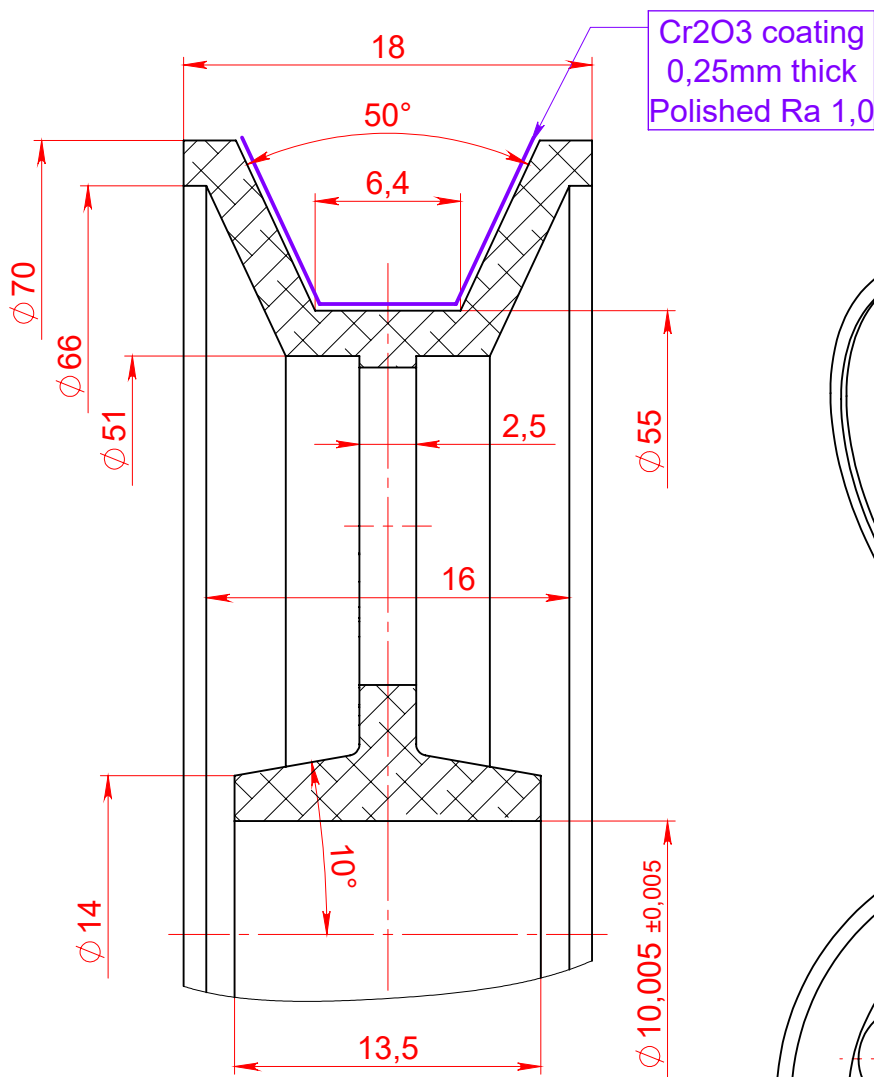

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM										 subec			FINISH: Cr2O3 coated 0,25mm thick Polished Ra1,0			MATERIAL: Aluminium	
HOLE COORDINATES ⊕ ± 0,1mm		CHAMFERS  0.2x45°		DEBUR AND BREAK SHARP EDGES			HRC:						WEIGHT: 38.91g				
GENERAL TOLERANCES FOR MANUFACTURING ISO 2768-fH													TITLE:				
LINEAR DIMENSIONS		<3 ±0,05	>3 ±0,05	>6 ±0,1	>30 ±0,15	>120 ±0,2	>400 ±0,3	>1000 ±0,5	Wheel Ø55mm, ALU Cr2O3 coated					A4			
ANGULAR DIMENSIONS		<10 ±1°	>10 ±30'	>6 ±20'	>30 ±10'												
STRAIGHTNESS — FLATNESS ▮		<10 0,02	>10 0,05	>30 0,1	>100 0,2	>300 0,3	>1000 0,4	DWG NO. ARTICLE NO. 3-401370-00_15396					 SHEET 1 OF 2				
PERPENDICULARITY SYMMETRY ⊥		<100 0,2	>100 0,3	>300 0,4	>1000 0,5												
RUN-OUT ↻ ○		0,1							PROJECT:					15396			