

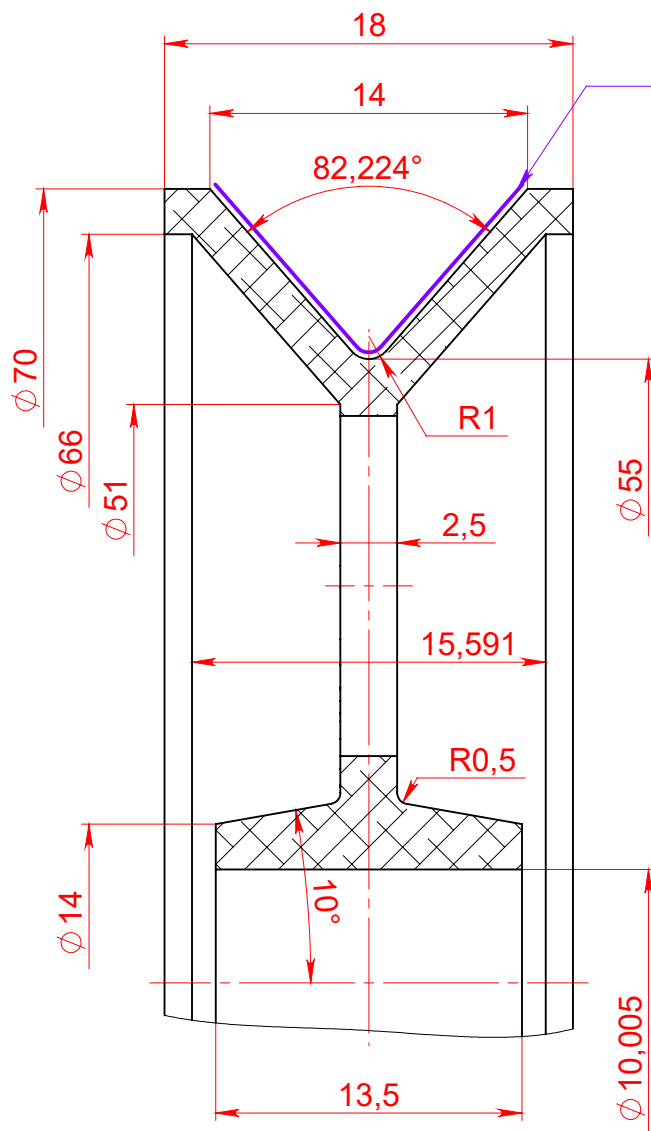


REVISIONS			
REV.	DATE	EDITOR	CHANGES, COMMENTS

SECTION A-A

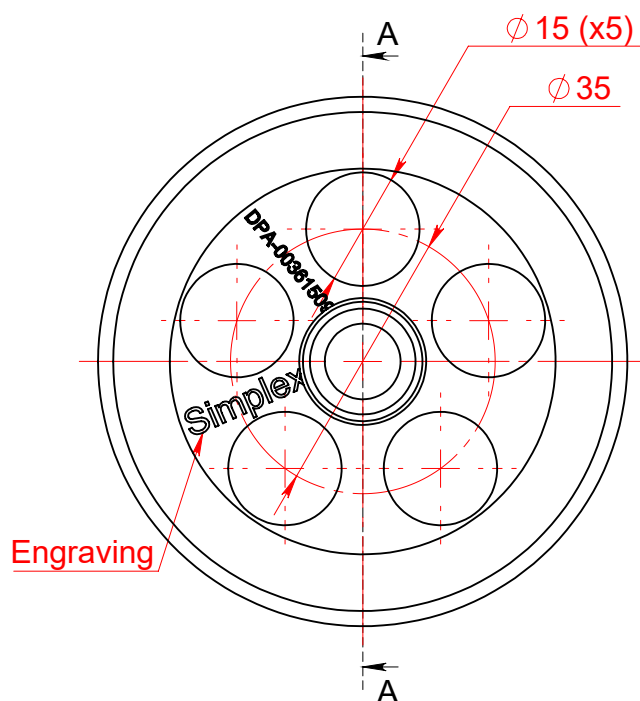

Cr₂)₃ coated
0,25mm thick
Polished Ra 1,0

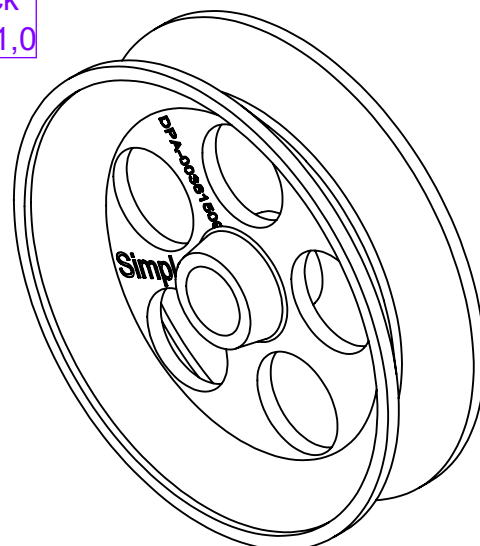

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM										 subec			FINISH: Cr2O3 coating 0,25mm thick		MATERIAL: Aluminium	
HOLE COORDINATES ⊕ ± 0,1mm		CHAMFERS  0.2x45°		DEBUR AND BREAK SHARP EDGES		HRC: Polished Ra 1,0		WEIGHT: 35.01g								
GENERAL TOLERANCES FOR MANUFACTURING ISO 2768-fH													TITLE: Wheel Ø55mm, ALU Cr2O3 coated		A4	
LINEAR DIMENSIONS		<3 ±0,05	>3 ±0,05	>6 ±0,1	>30 ±0,15	>120 ±0,2	>400 ±0,3	>1000 ±0,5								
ANGULAR DIMENSIONS		<10 ±1°	>10 ±30'	>50 ±20'	>120 ±10'					DRAWN EIL 2021-06-01		DWG NO. 3-401370-00_12070A		ARTICLE NO. SHEET 1 OF 2 12070A		
STRAIGHTNESS FLATNESS		<10 0,02	>10 0,05	>30 0,1	>100 0,2	>300 0,3	>1000 0,4									
PERPENDICULARITY SYMMETRY		<100 0,2	>100 0,3	>300 0,4	>1000 0,5					PROJECT:						
RUN-OUT		0,1														