
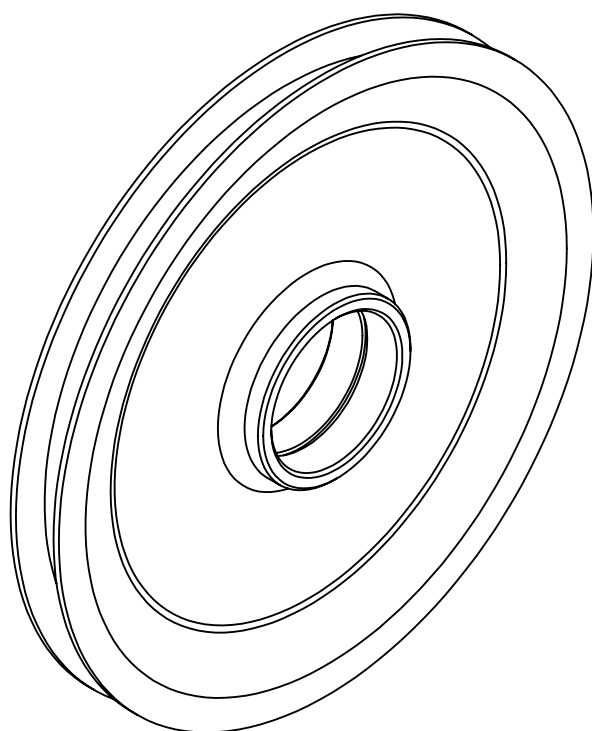


| REVISIONS |      |        |                   |
|-----------|------|--------|-------------------|
| REV.      | DATE | EDITOR | CHANGES, COMMENTS |

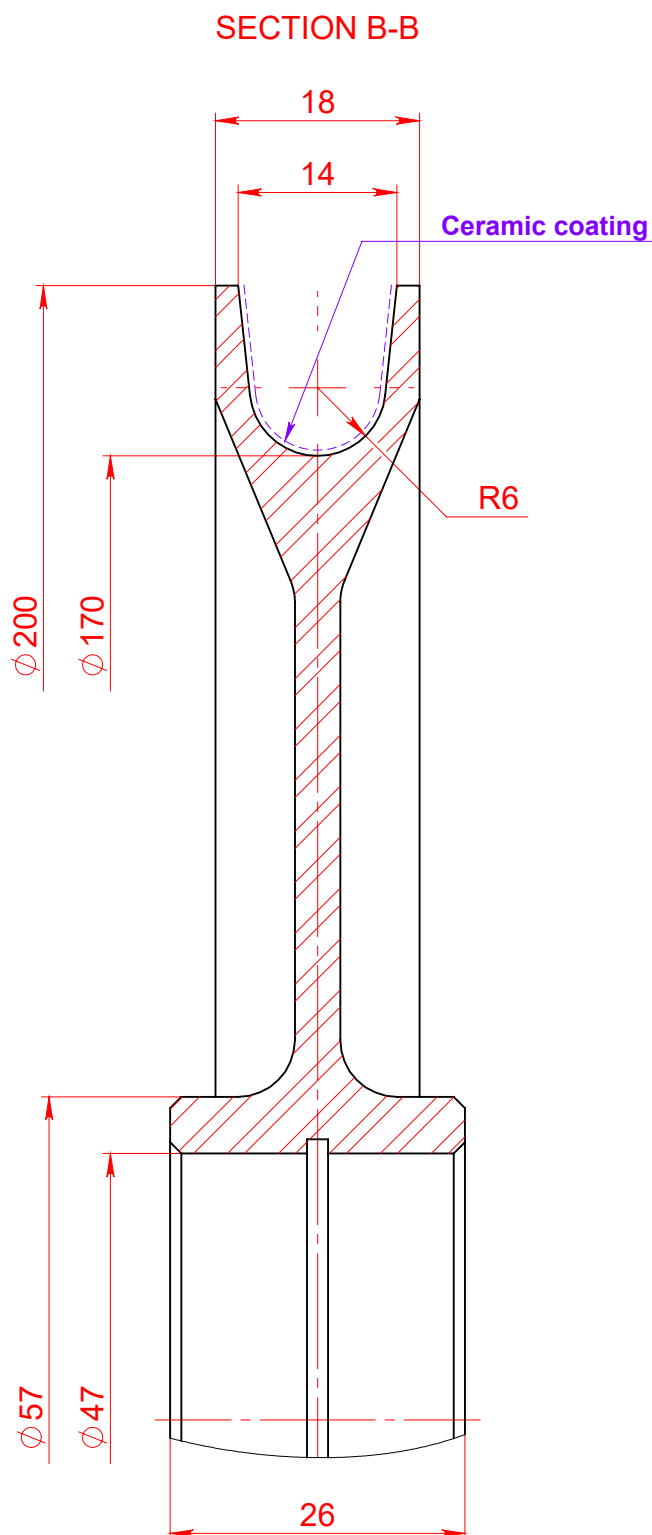

For bearings: 6005-2Z (25/47x12)

|                                                  |  |                                                                                                         |  |                             |  |                                   |  |                                                                                                                 |      |      |           |      |                 |                   |                                                                        |  |             |    |  |
|--------------------------------------------------|--|---------------------------------------------------------------------------------------------------------|--|-----------------------------|--|-----------------------------------|--|-----------------------------------------------------------------------------------------------------------------|------|------|-----------|------|-----------------|-------------------|------------------------------------------------------------------------|--|-------------|----|--|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM |  |                                                                                                         |  |                             |  |                                   |  | <div></div> <div>subec</div> |      |      | FINISH:   |      | MATERIAL:       |                   |                                                                        |  |             |    |  |
| HOLE COORDINATES<br>⊕ ± 0,1mm                    |  | CHAMFERS<br> 0,5x45° |  | DEBUR AND BREAK SHARP EDGES |  | Ceramic coated groove<br>Polished |  |                                                                                                                 |      |      | Aluminium |      |                 |                   |                                                                        |  |             |    |  |
| GENERAL TOLERANCES FOR MANUFACTURING ISO 2768-FH |  |                                                                                                         |  |                             |  |                                   |  |                                                                                                                 |      |      | HRC:      |      | WEIGHT: 492.58g |                   |                                                                        |  |             |    |  |
| LINEAR DIMENSIONS                                |  |                                                                                                         |  |                             |  |                                   |  | <3                                                                                                              | >3   | >6   | >30       | >120 | >400            | >1000             | TITLE:<br><br>Wheel Ø170 Alu; ØD=200;<br>Øe=47; B=26; B1=18; Groove R6 |  |             | A4 |  |
| ANGULAR DIMENSIONS                               |  |                                                                                                         |  |                             |  |                                   |  | <10                                                                                                             | >10  | >50  | >120      |      |                 |                   |                                                                        |  |             |    |  |
| STRAIGHTNESS — FLATNESS                          |  |                                                                                                         |  |                             |  |                                   |  | <10                                                                                                             | >10  | >30  | >100      | >300 | >1000           | DWG NO.           |                                                                        |  | ARTICLE NO. |    |  |
| PERPENDICULARITY SYMMETRY                        |  |                                                                                                         |  |                             |  |                                   |  | <100                                                                                                            | >100 | >300 | >1000     |      |                 |                   |                                                                        |  |             |    |  |
| RUN-OUT ROUNDNESS                                |  |                                                                                                         |  |                             |  |                                   |  |                                                                                                                 |      |      | 0,1       |      |                 | PROJECT:<br>..... |                                                                        |  | 16747       |    |  |
|                                                  |  |                                                                                                         |  |                             |  |                                   |  |                                                                                                                 |      |      |           |      |                 |                   |                                                                        |  |             |    |  |