


CAD GENERATED DRAWING. DO NOT MANUALLY UPDATE. DO NOT SCALE. PROPERTY OF SUBEC AB. DOCUMENT MUST NOT BE REPRODUCED, COPIED OR USED FOR ANY UNAUTHORIZED PURPOSE.

DRAWING SIMILAR TO



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM		 subec		FINISH:		MATERIAL:		
				HRC:		WEIGHT: 51330.8g		
				TITLE: Height Adj. Stand, 1000+/- 140mm, with crank; Special adj. Base plate: V-shape support				
SPECIFICATION:			NAME	DATE	A4		SCALE: 1:10	
.....		DRAWN	StS	2025-07-03			SHEET 1 OF 2	
		PROJECT:			DWG NO.		ARTICLE NO.	
					3-400076-08_20490			
							20490	

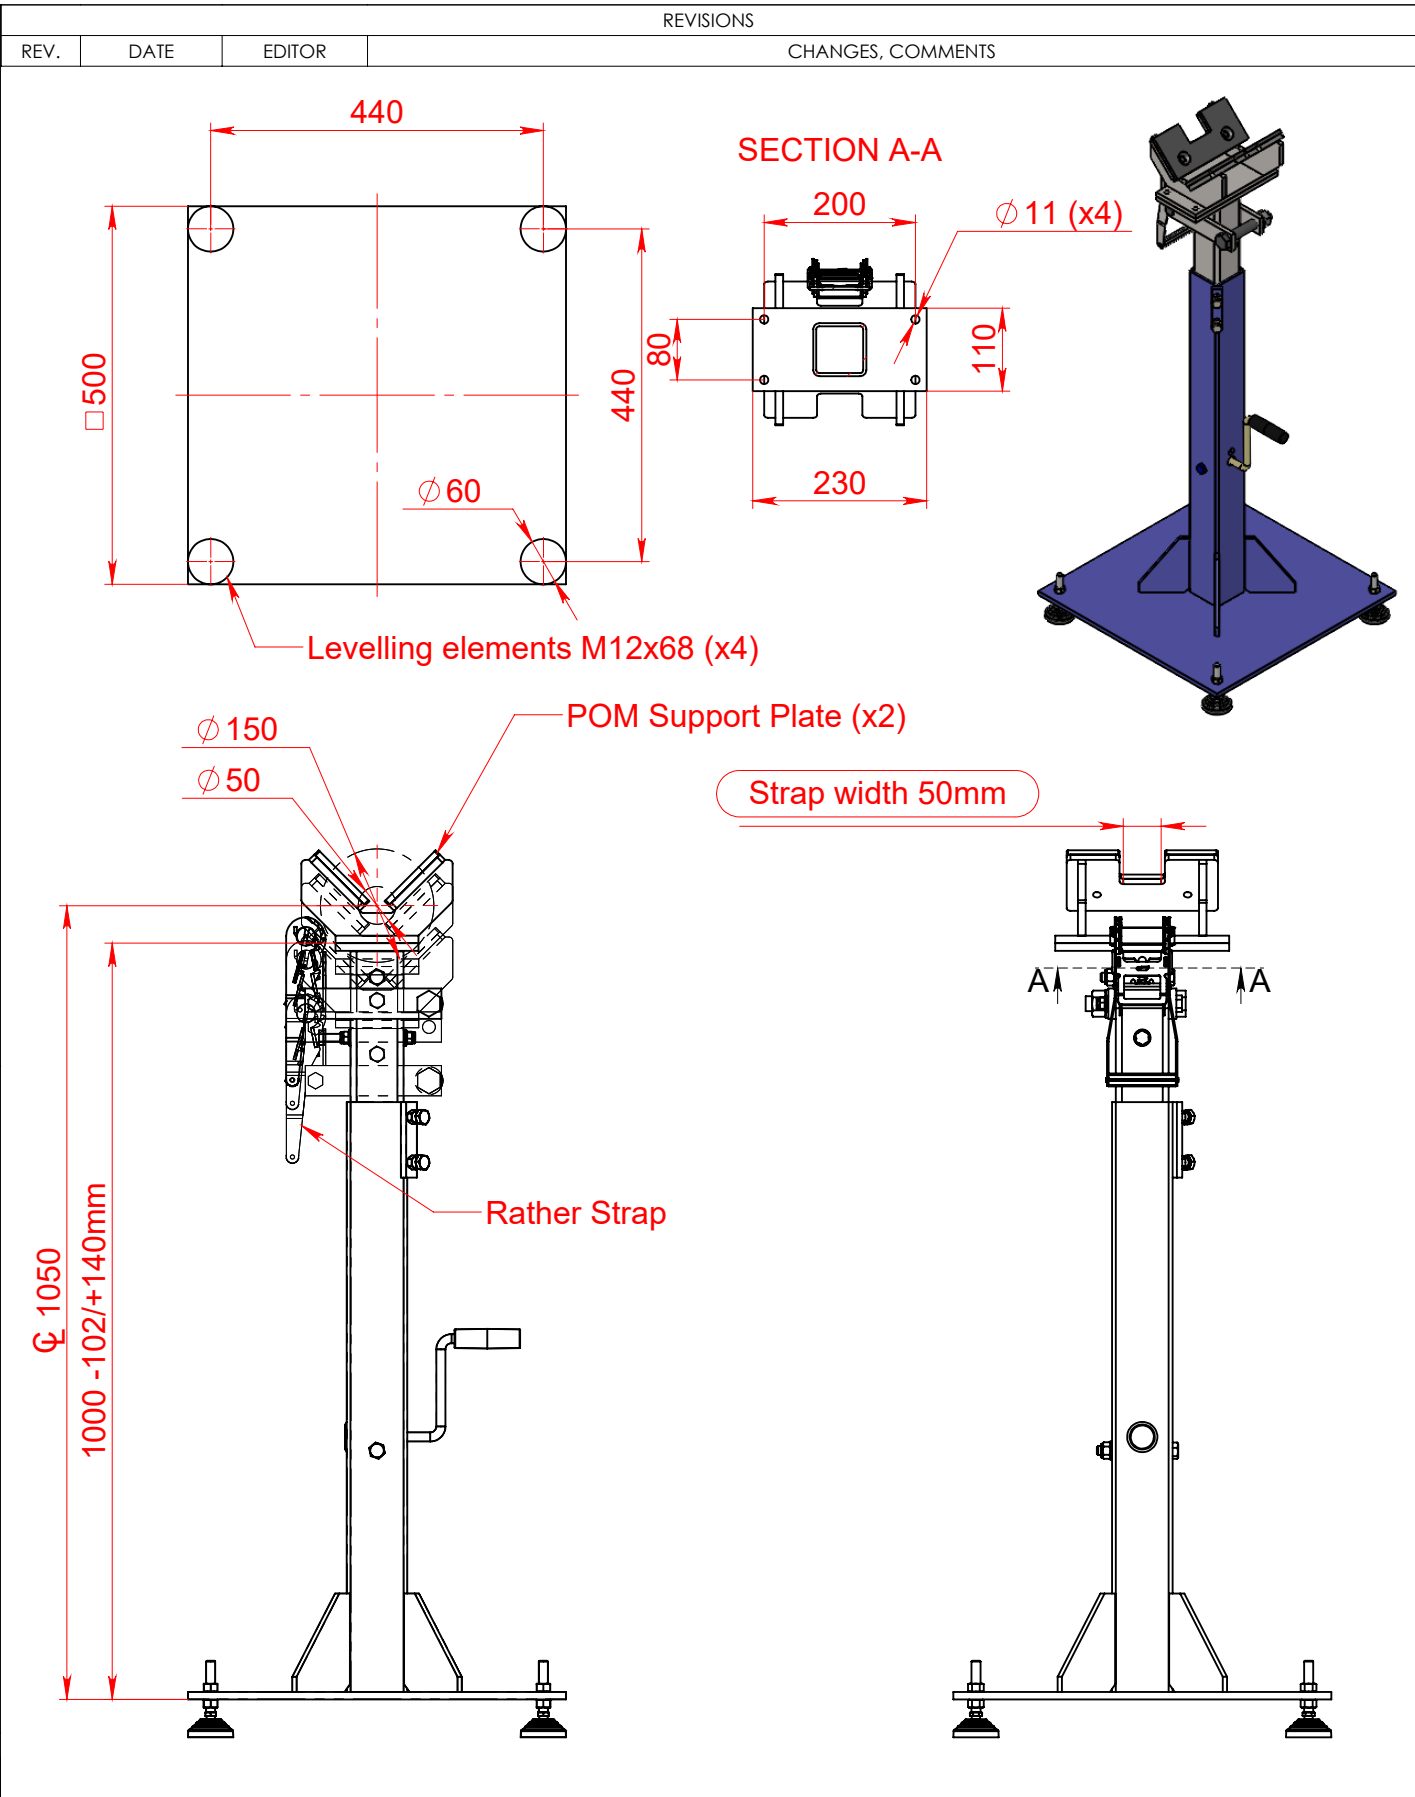

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM		 subec		FINISH:		MATERIAL:	
				HRC:		WEIGHT: 51330.8g	
				TITLE: Height Adj. Stand, 1000+/- 140mm, with crank; Special adj. Base plate: V-shape support		A3	
SPECIFICATION:			NAME	DATE	DWG NO.		ARTICLE NO.
		DRAWN	Sfs	2025-07-03	3-400076-08_20490		 SHEET 2 OF 2
		PROJECT:					
					20490		

Web Lashing POWERTEX Trucker

Product information



POWERTEX



POWERTEX Trucker lashings are available as endless or 2-part lashings and used for professional haulers.

Heavy duty lashing made of high strength polyester yarn and steel ratchets and hooks

Suitable for professional transporters looking for extra high strength and durability

- Strong and durable with LC 2500 daN and STF 350 daN
- Webbing having min breaking strength of 7500 daN
- Blue webbing with 5 + 5 black stripes for easy identification
- Both long part and short part carry blue identification labels
- Label gives information on STF and lashing capacity for different lashing connections
- Each part is marked with a unique serial number for safe equipment registration
- The blue information label is protected by additional layer of transparent plastic for long life
- Year/Month calendar printed on the label where latest inspection date can be marked or punched
- All lashings carry a white label with important warning instructions and user instruction pictogram
- Each lashing marked with QR code to access full user manual
- Cr6 free galvanization – better for health and environment
- Trucker can be supplied with other lengths and other end fittings on request.

Safety factor: Webbing min. 3, Rachets min. 2 and Hooks min. 2

Material: Polyester and steel

Marking: According to standard, POWERTEX, LC, STF, length, manufacturing year, batch number, serial number, QR code, inspection calendar, user warning instructions

Temperature range: -40°C up to +120°C

Standard: EN 12195-2

Note: Protect the lashings from sharp edges

Part code	LC daN	2xLC (daN)	Length m	Band width mm	Design	Fitting	STF daN	Colour	Weight kg
-----------	-----------	---------------	-------------	------------------	--------	---------	------------	--------	--------------

701401002200050	2,500	5,000	10	50	2-part	Wire hook double	350	Blue	2.67
-----------------	-------	-------	----	----	--------	------------------	-----	------	------